


- robust enclosure for use in mechanical and electrical engineering
- 2 versions: well-priced version in ABS or polycarbonate version (listed acc. to UL 94 V-0) for improved resistance to shock
- Top and base available in different colours
- Snap closing due to specially developed captive fastening screws (included in delivery)
- moulded sealing, integrated
- rated break point for M20 connection with screw thread
- fixing points for attaching PCB's in the base part
- 3 mounting options:
 - via screw holes through the base (outside the sealing area)
 - clip-on adapter for mounting on top hat rail
 - clip-on flange for wall mounting
- customised sizes and machining on request



PCB's (Printed Circuit boards)

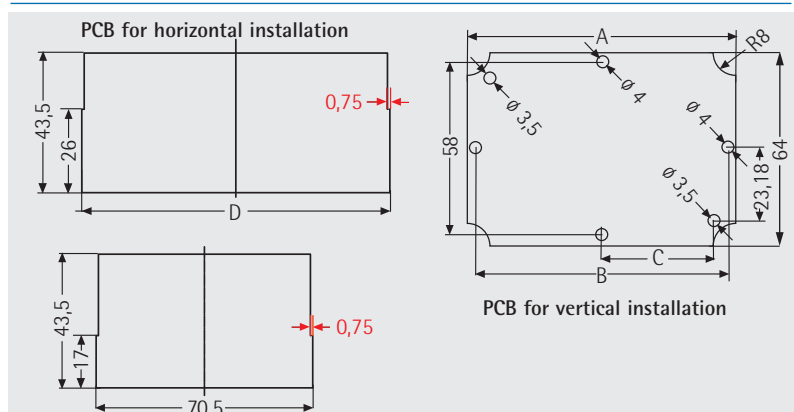

Typ	A	B	C	D
Ipro 1	56,5	51,5	20,6	63
Ipro 2	89,7	84,7	37,2	96,2
Ipro 3	122,7	117,7	53,7	129,2

Protection:

IP 67 (type IPro1 and IPro2)

IP 66 (type IPro3)

Order information ABS version

Type	Dimensions H x W x D mm	Top black	Base black Top grey	Top transparent	Top black	Base grey Top grey	Top transparent
IPro1	80,2 x 72,8 x 54,7	447-100-01	447-100-02	447-100-03	447-100-04	447-100-05	447-100-06
IPro2	80,2 x 106 x 54,7	447-200-01	447-200-02	447-200-03	447-200-04	447-200-05	447-200-06
IPro3	80,2 x 139 x 54,7	447-300-01	447-300-02	447-300-03	447-300-04	447-300-05	447-300-06

Order information Polycarbonate version

Type	Dimensions H x W x D mm	Top black	Base black Top grey	Top transparent	Top black	Base grey Top grey	Top transparent
IPro1	80,2 x 72,8 x 54,7	447-100-07	447-100-08	447-100-09	447-100-10	447-100-11	447-100-12
IPro2	80,2 x 106 x 54,7	447-200-07	447-200-08	447-200-09	447-200-10	447-200-11	447-200-12
IPro3	80,2 x 139 x 54,7	447-300-07	447-300-08	447-300-09	447-300-10	447-300-11	447-300-12

Accessories

Wall-mounting flange, 1 pieces black	Adapter for top hat rail, 1 pieces black	cable gland black
447-610-00	447-620-00	447-630-00
grey	grey	grey
447-610-10	447-620-10	447-630-10

apra-norm Elektromechanik GmbH · Dept. RADAPLAST

Gewerbegebiet · D-54552 Mehren/Vulkaneifel

Phone: +49 (0) 65 92 20 4-0 · Fax: +49 (0) 65 92 20 4-100

sales@apra.de · www.apra-norm.com

Subject to technical modifications.

20.03.2009

97